


Planet KG-A8 | A10 | A12 narrow

→ 11,5 x 38 mm | ↓ 16 mm | ≤ 48 dB



Main features

- Seal height up to ↓ 16 mm
- Acoustic insulation up to ≤ 48 dB in case of an optimal sealing
- For one and double leaf folding all-glass doors, with a glass thickness of 8, 10 and 12 mm
- Planet KG-A8 | A10 | A12 narrow to be attached and glued
- Planet drop-down seal cemented in KG-A8 | A10 | A12 narrow protection profile
- Unilateral and soundless release, silent seal
- Due to parallel drop-down no trailing on the floor
- Automatic compensation at inclined floors
- High-grade silicone lip, simple lift height adjustment
- Can be shortened up to the next shorter length on stock
- 7 years warranty

Versions / options

- Planet KG-A8 | A10 | A12 narrow → RD ≤ 48 dB, smoke-shielding
- Planet KG-A8 | A10 | A12 narrow → FH+RD ≤ 48 dB, fire-retard. + smoke-shield.
- Option bevel lip ≤ 44 dB, up to ↓ 20 mm, for uneven floors
- Special versions on request

Surfaces

- Protection profile silver anodised EV1
- Protection profile stainless steel satin anodised

Door types with Planet KG-A8 | A10 | A12 narrow




More functions



Technical specifications

Profile material	aluminum, → 11,5 x 38 mm, silver anodised EV1 or stainless steel satin anodised
Seal profile	high-grade silicone or high-grade self-extinguishing silicone
Seal height	up to ↓ 16 mm
Sound absorption value	up to ≤ 48 dB at 7 mm space to the floor; up to ≤ 46 dB at 14 mm space to the floor
Lift height adjustment	on the release knob with an Allen key 3 mm
Lengths in stock	459, 584, 709, 834, 959, 1084, 1209, 1334, 1459 mm
Special lengths	on request up to 6000 mm, sliding doors up to 1600 mm
Release	unilaterally on hinge side
Can be shortened	up to the maximum of 125 mm
Fastening	to be glued
Frame protector plate	stainless, hammer fixed, 20 x 20 mm
Test approvals	on request

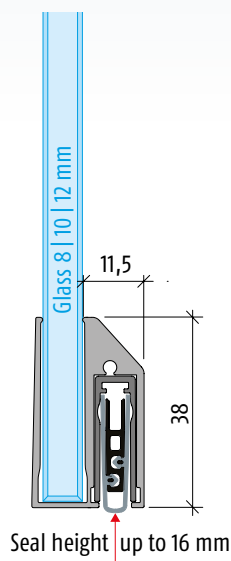



Planet KG-A8 | A10 | A12 narrow, attached and glued



Planet KG-A8 | A10 | A12 narrow, attached and glued release side



Planet KG-A8 | A10 | A12 narrow, with cover plate



Option: Planet KG-A8 | A10 | A12 narrow, bevel lip for **uneven floors**



Accessories: Planet frame protector plate, type 1 (stainless), 20 x 20 mm



Cover plates Planet KG-A narrow

Order specifications

Planet KG-A8 A10 A12 narrow → RD ≤ 48 dB, → silver anodised EV1 incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-A8s A10s A12s*
Planet KG-A8 A10 A12 narrow → FH+RD ≤ 48 dB, → silver anodised EV1 incl. set of cover plates and frame protector plate, type 1	Prod. code 39xxx-A8s A10s A12s*
Planet KG-A8 A10 A12 narrow → RD ≤ 48 dB, → stainless steel satin anodised incl. set of cover plates and frame protector plate, type 1	Prod. code 38xxx-A8Xs A10Xs A12Xs*
Planet KG-A8 A10 A12 narrow → FH+RD ≤ 48 dB, → stainless steel satin anodised incl. set of cover plates and frame protector plate, type 1	Prod. code 39xxx-A8Xs A10Xs A12Xs*

* xxx = refer to price list for profile length

Accessories | Options

Planet frame protector plate type 1 (stainless); possible type 2/3/4/5 → refer to chapter Accessories Options	Prod. code 900014
Cut the Planet to fix dimension	Prod. code 900225
Set of Planet cover plates KG-A / F10 narrow	Prod. code 902074
Sliding door	Prod. code 900908
Bevel lip (≤ 44 dB, up to ↓ 20 mm) DIN L or DIN R	refer to price list, options / supplements

Advertising text



Planet KG-A8 | A10 | A12 narrow → RD (smoke-shielding) ≤ 48 dB

Automatic door drop-down seal Planet KG-A8 | A10 | A12 narrow → RD ≤ 48 dB, unilateral release with parallel drop-down and automatic compensation at inclined floor, protection profile silver anodised EV1 or stainless steel satin anodised, to be attached and glued, seal height up to ↓ 16 mm. Lip from silicone. Protection profile and profile made from aluminum → 11,5 x 38 mm, incl. cover plate on lock side for folding doors.

Advertising text



Planet KG-A8 | A10 | A12 narrow → FH+RD (fire-retardant + smoke-shielding) ≤ 48 dB

Automatic door drop-down seal Planet KG-A8 | A10 | A12 narrow → RD+FH ≤ 48 dB, appropriate for fire-retardant and smoke-shielding doors, sound absorption value SK 1-3, unilateral release with parallel drop-down and automatic compensation at inclined floor, protection profile silver anodised EV1 or stainless steel satin anodised, to be attached and glued, seal height up to ↓ 16 mm. Lip from silicone. Protection profile and profile made from aluminum → 11,5 x 38 mm, incl. cover plate on lock side for folding doors.